


MOUNTING PROCEDURE**KIT LICENCE PLATE
YAMAHA XSR 700****YS7104**WWW.BARRACUDAMOTO.COM**KIT**

X1. SPECIFIC BRACKET
X1. HEADLIGHT BRACKET
X1. ARCHED BRACKET
X2. SCREW 6X35 "ROUND HEAD"
X2. SCREW 6X50 "ROUND HEAD"
X2. THICKNESS H20
X2. THICKNESS H40
X4. WASHER Ø 6 "LARGE"
X6. AUTOLOCK NUT Ø 6
X1. "X" LICENCE PLATE

MOUNTING PROCEDURE:

- REMOVE THE ORIGINAL LICENCE PLATE, UNFIX THE HEADLIGHT WITH HIS SEAL, APPROACH ALL TO THE BARRACUDA PUTTING THE HEADLIGHT BRACKET AS SHOWN IN THE SCHEME;
- PUT THE ARCHED BRACKET TO THE HIGHLIGHTED;
- FIND THE FIXING POINT AND FIX THE LICENCE PLATE USING 6X35 AND 6X50 SCREWS AND THE RELATIVES THICKNESS LIKE THE SCHEME;
- LOCK THE SCREWS AND REPEAT THE OPERATION FOR ALL THE FIXING POINT OF BRACKET;
- APPLY THE "X" LICENCE PLATE TO THE JUNCTION OF SPECIFIC BRACKET;

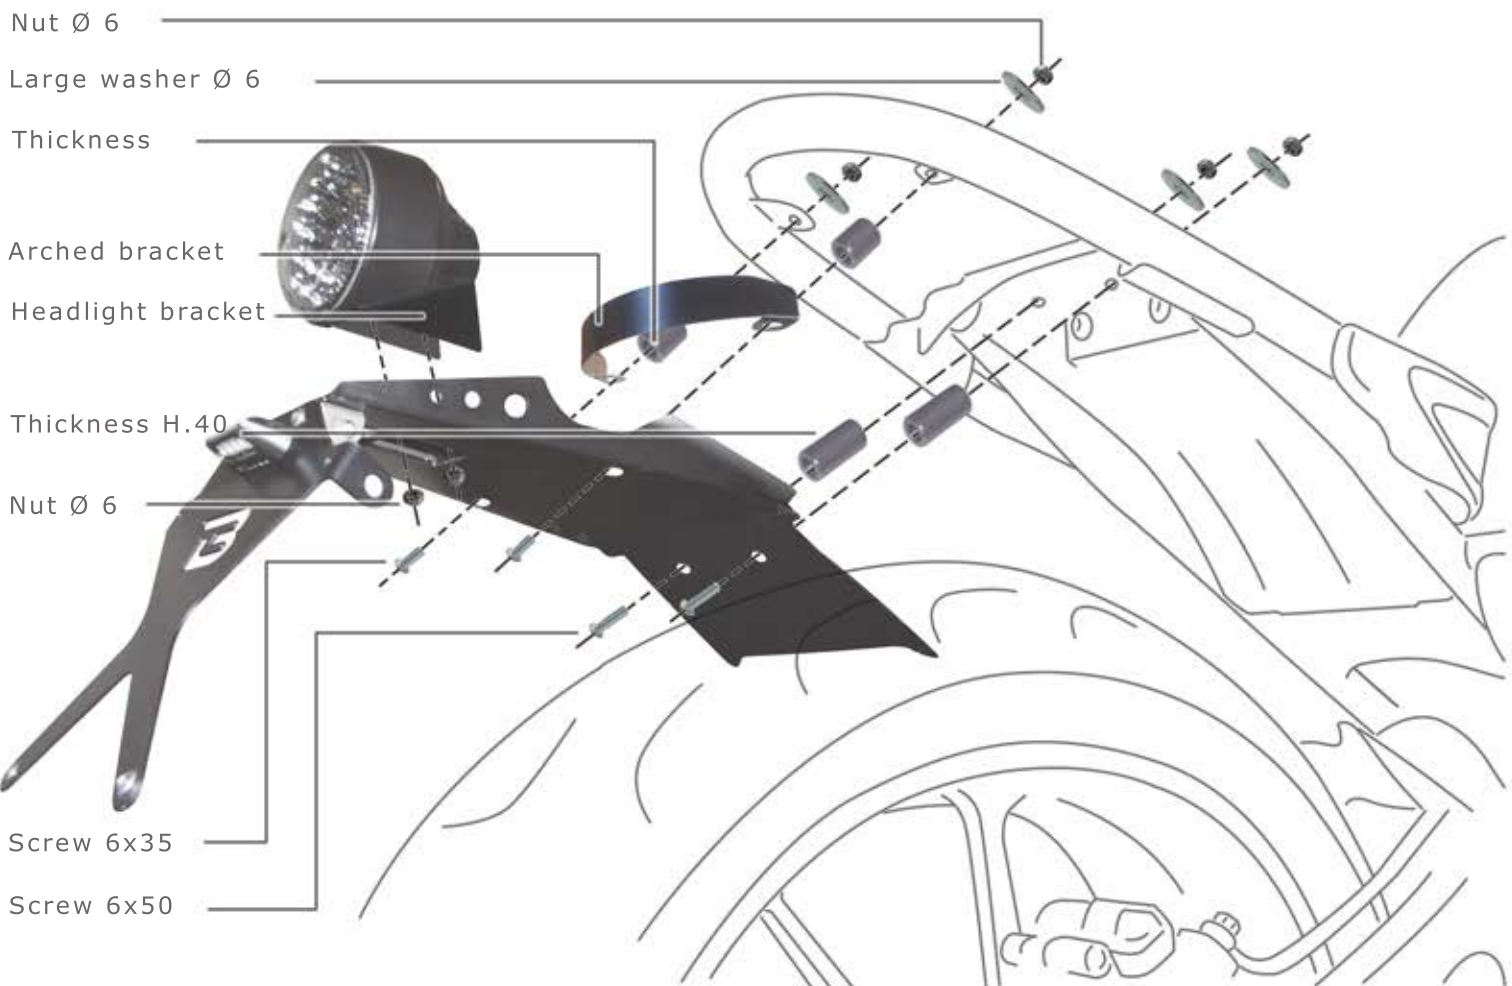

NOTE: WE ADVISE TO MAINTAIN AN INCLINATION NOT OVER 30° TO AVOID SANCTIONS OR POSSIBLE BROKEN.