
## **Adjustments**


#### **Warning!**

Before riding, always make sure that the basic settings made by Öhlins are according to recommended Set-up Data. Read about adjustments and setting up in the Öhlins Owner's Manual before you make any adjustments. Contact an Öhlins dealer if you have any questions about setting up the shock absorber.

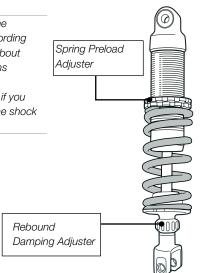

## Set-up Data

Recommended set-up			Shock
Rebound	12 clicks	absorber data	
Spring Preload	10 mm	Length	332 mm
Spring		Stroke	63
Part No.	Rate	Free Sag and Ride Height	
01096-31	95 N/mm	R1 - R2 = 12 mm	
Free length	190mm	R1 - R3 = 30 mm	

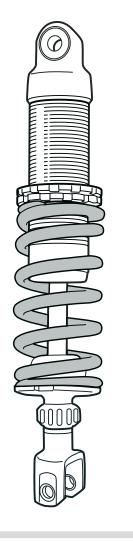

Before installing this product, check the contents of the kit. If anything is missing, please contact an Öhlins dealer.

#### Kit Contents

Part No.	Pcs.
KA 009	1
00710-02	1
00192-01	2
01180-01	1
07241-02	1
	Part No. KA 009 00710-02 00192-01 01180-01 07241-02

Please note that during storage and transportation, especially at high ambient temperature, some of the oil and grease used for assembling may leak and stain the packaging. This is in no way detrimental to the product, wipe off the excessive oil/grease with a cloth.


#### \land Warning!

Before installing this product, read the Öhlins Owner's Manual. The shock absorber is an important part of your vehicle and will affect the stability.

Ohlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact your Öhlins distributor. Please consult your Öhlins dealer if you have any questions regarding the contents in this document.

> Part no. KA009\_0 Issued 2010-02-23



Öhlins Racing AB Box 722 S-194 27 Upplands Väsby, Sweden Phone +46 8 590 025 00 fax +46 8 590 025 80



# Shock Absorber for Kawasaki Z 750

## **Mounting Instructions**



25 80 ADVANCED SUSPENSION TECHNOLOGY

## How to install

#### **Warning!**

It is advisable to have an Öhlins dealer install the shock absorber.

When installing, consult your Vehicle Service Manual.

#### 1

Put the motorcycle on a workstand so that the rear wheel barely touches the ground.

#### **Warning!**

Make sure the vehicle is securely supported so that it will not tip.

#### 2

Loosen the pull rods of the suspension linkage at the swing arm.

#### 3

Remove the original shock absorber. Consult your Vehicle Servie Manual.

#### Note!

Before installing the Öhlins shock absorber clean the vehicle thoroughly.

#### 4

Install the Öhlins shock absorber in the same way as the original unit. Do not tighten yet.

#### ۲

#### Note!

Lower the motorcycle so that the shock absorber is sligthly compressed, before tightening the screws.

#### 5

Tighten the upper and lower attachment screw. Tighten the pull rods at the swing arm.

6

Make sure that all removed parts are reinstalled in the same way as they were before the installation of the Öhlins Shock Absorber.

### "Caution!

Make sure that all screws are tightened to the correct torque and that nothing fouls or restricts movement of the shock absorber when the suspension is fully compressed or extended.